

SPECIFICATION SHEET



DESCRIPTION 90 5013S

- 15G HPPE cut resistant gloves, 2nd time black sandy nitrile palm coating

FEATURES AND BENEFITS

- Durable HPPE knitting with excellent cut resistance
- Anti-abrasion & anti-slip
- High performance cut resistant level secure against mechanical hazards
- Sandy finished coating with excellent grip in wet and oil environments




APPLICATIONS

- Metal & Glass Handling
- Sharp small parts handling
- Automotive industry
- Wood working
- Sanitation&Recycling
- Transportation
- Warehousing
- Construction
- General maintenance

CARE INSTRUCTIONS

- Machine wash in warm water with Detergent and Bleach. Rinse well and spin extract using high speed. Tumble dry on Low heat setting. Proper washing will inhibit odors caused by the growth of bacteria or mold.

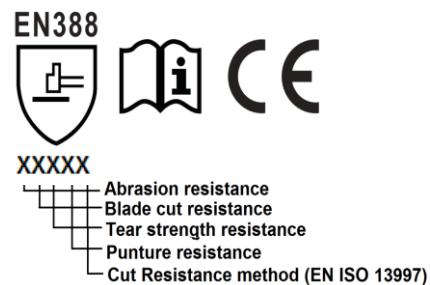

TECHNICAL DATA

Description	15G HPPE cut resistant gloves, 2nd time black sandy nitrile palm coating				
Materials	Liner: HPPE knit				
	Coating: sandy nitrile double dipping				
Cuff Style	Elastic seamless knit				
Color	Grey, Green, Blue...				
Size	7/S	8/M	9/L	10/XL	11/XXL
Length (cm)	23	24	25	26	27
Palm width (cm)	9	9.5	10	10.5	11
Packing	Printing logo, 12 pairs per bag, 120 pairs per case				

Tolerance: ±5mm

STANDARDS

- CE CATEGORY: II Intermediary risk in accordance with:
- EN 420 / AS / NZS2161.2:2016 General Requirements
- EN 388 / AS / NZS2161.3:2016 Protection Against Mechanical Risks